

**AASERT FINAL TECHNICAL REPORT**

**US AIR FORCE / OFFICE OF SCIENTIFIC RESEARCH  
AWARD NUMBER: F49620-95-1-0414**

**PRIMARY INVESTIGATOR: PROFESSOR TATSUO ITOH  
UNIVERSITY OF CALIFORNIA, LOS ANGELES  
BOX 951594  
LOS ANGELES, CA 90095-1594**

## REPORT DOCUMENTATION PAGE

AFRL-SR-BL-TR-00-

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering the required information, reviewing the collection of information, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Washington Headquarters Service, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Project Director (0304-0188), Washington, DC 20503.

0149

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE	3. REPORT TYPE	Final 01 Jun 95 to 31 May 99	
4. TITLE AND SUBTITLE (AASERT95) Active integrated beam steering and switching array with all optical control			5. FUNDING NUMBERS 61103D 3484/TS		
6. AUTHOR(S) Professor Itoh					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of California, LA 1400 Ueberroth Bldg Box 951406 Los Angeles, CA 90095-1406			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) AFOSR/NE 801 N Randolph Street Rm 732 Arlington, VA 22203-1977			10. SPONSORING/MONITORING AGENCY REPORT NUMBER  F49620-95-1-0414		
11. SUPPLEMENTARY NOTES					
12a. DISTRIBUTION AVAILABILITY STATEMENT APPROVAL FOR PUBLIC RELEASE, DISTRIBUTION UNLIMITED				12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  In this work, a beam-scanning array for antenna remoting via an optical link is presented. Optical control over the main beam is accomplished through the use of a photosensitive resonator. Experimental data shows a total scan angle up to 36° can be achieved with this optical technique.					
14. SUBJECT TERMS				15. NUMBER OF PAGES	
				16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT  UNCLASSIFIED		18. SECURITY CLASSIFICATION OF THIS PAGE  UNCLASSIFIED		19. SECURITY CLASSIFICATION OF ABSTRACT  UNCLASSIFIED	
				20. LIMITATION OF ABSTRACT  UL	

# AASERT FINAL TECHNICAL REPORT

## ALL-OPTICALLY CONTROLLED BEAM-SCANNING ARRAY FOR ANTENNA REMOTING APPLICATIONS

Tatsuo Itoh

University of California, Los Angeles  
405 Hilgard Avenue, Los Angeles CA 90024

### ABSTRACT

In this work, a beam-scanning array for antenna remoting via an optical link is presented. Optical control over the main beam is accomplished through the use of a photosensitive resonator. Experimental data shows a total scan angle up to  $36^\circ$  can be achieved with this optical technique.

### INTRODUCTION

Radar, missile guidance and communications systems typically have rigid spatial constraints. However, in conventional systems, large amplifiers and motors are required to transmit high power and scan the antenna main beam, respectively. Waveguide typically is used because it has low loss and high power capability, but is bulky and not easily routed. These obstacles have led to continuing research in system and component designs to produce integrated and compact designs.

One method that has shown promise in remedying these problems is the active antenna array, which integrates active components directly into the antenna platform. It has been shown that the main beam of an active antenna array can be electronically scanned by controlling the phase between adjacent antenna element [1]-[3]. Recently, an active phased array with optical input and beam-scanning capability was reported [4]. In [4], a microwave reference signal is provided

through an optical fiber link, but array control signals are provided electronically by varying the bias of the active device.

In this work, we attempt to increase the merits of optical remoting of antennas by demonstrating additional optical control over an active antenna phased array. Previous researchers have shown that performance of MESFET devices can be altered by applying optical illumination [5]. Recently, direct illumination of oscillating devices was shown capable of achieving  $20^\circ$ -scan angle, but can only be scanned in one direction [6]. In this work, we present an optical resonator, which achieves  $\pm 18^\circ$  of main beam scan control.

### DESIGN

Figure 1. shows the basic architecture for an  $n$ -element linear beam-scanning array. To

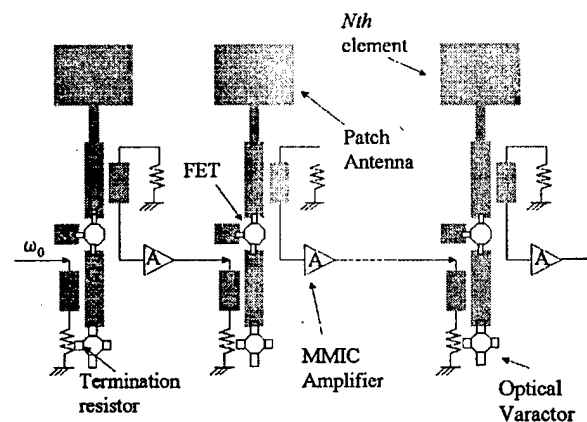


Figure 1. Architecture of  $n$ -element array

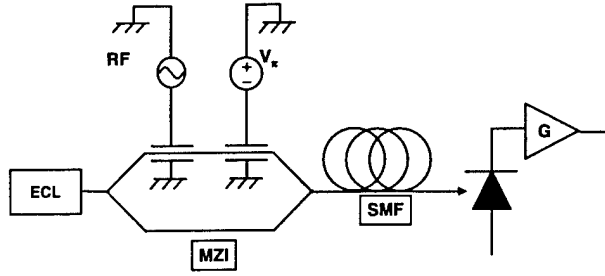


Figure 2. Optical link for antenna remoting.

achieve beam steering, a progressive phase shift is needed between adjacent elements. This is done by using unilateral injection locking and controlling the free-running frequency of the oscillating MESFETs.

Transmission type injection locking is provided at the gate of each oscillating MESFET. Two MESFETs are in each cell, one an oscillator and the second an optically controlled varactor. The source of the varactor MESFET is shorted to ground. The drain is "self-biased" through the device. DC Bias is applied at the gate. Microstrip from the gate of the varactor device to the gate of the oscillating device couples in the injection locking circuit and forms the remainder of the optical resonator circuit. Optical illumination then varies  $C_{gs}$  of the varactor MESFET as a function of illumination intensity. This varies the reactance of the MESFET to alter the oscillation condition and therefore change the free-running oscillation frequency.

For antenna remoting applications, the reference signal is applied by an optical delivery system. In this work, the system shown in Figure 2 is used. A microwave tone is generated on an optical carrier by external modulation with a Mach-Zehnder intensity modulator (MZI). An external



Figure 3. MESFET transistor mounted through circuit substrate for optical biasing.

cavity laser (ECL) at a wavelength of 1550 nm is used as the carrier. The modulator is biased at quadrature with and driven by a RF tone at the injection locking frequency. A single-mode fiber carries the output of the MZI to the antenna site, where it is detected by a high-speed photodetector. The photocurrent is then amplified by low noise amplifier for injection into the phased array antenna.

In this work, a two-element active antenna array is tested. From Kurokawa [7], the phase between adjacent elements is given by:

$$\Delta\phi = \arcsin\left(\frac{\omega_f - \omega_0}{\Delta\omega_n}\right)$$

Note that  $\omega_0$  is the injected signal frequency,  $2\Delta\omega_m$  is the locking bandwidth and  $\omega_f$  is the free-running frequency of the oscillator given by (for transmission-type injection locking):

$$\Delta\omega_m = \frac{\omega_0}{Q_{ext}} \sqrt{\frac{P_i}{P_0}}$$

Where  $Q_{ext}$  is the external Q of the resonant circuit,  $P_i$  is the injection locking power and

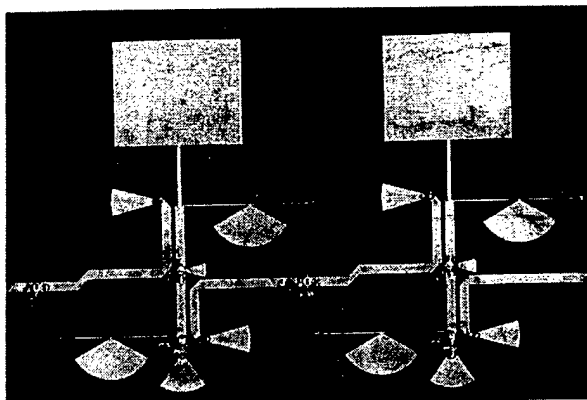


Figure 4. Fabricated array.

$P_o$  is the oscillator power. With the adjacent antenna radiating with phase difference  $\Delta\phi$ , the main beam can be scanned to an angle:

$$\theta = \arcsin\left(\frac{\lambda_0 \Delta\phi}{2\pi d}\right)$$

This theory is used to design a two-element array. The circuit is realized in microstrip and fabricated on a substrate with  $\epsilon_r = 2.33$  and substrate height of 31 mils. Element spacing is  $0.7 \lambda_0$  at 4.0 GHz, corresponding to a theoretical maximum beam-scan angle of  $\pm 21^\circ$  at injection locking edge. GaAs MESFET transistors manufactured by NEC (part #NE76184A) are used as the active devices in the circuit. The package of the varactor transistor is removed to permit illumination by an optical source. The optical varactor is mounted through the substrate and illumination is applied from the rear of the circuit to prevent pattern disruption. Figure 3 and 4 show a mounted transistor and the completed circuit, respectively.

## II. RESULTS

After fabrication, circuit performance is determined. Variable power optical illumination is provided a Cole Parmer Low Noise Illumination Source. The source is

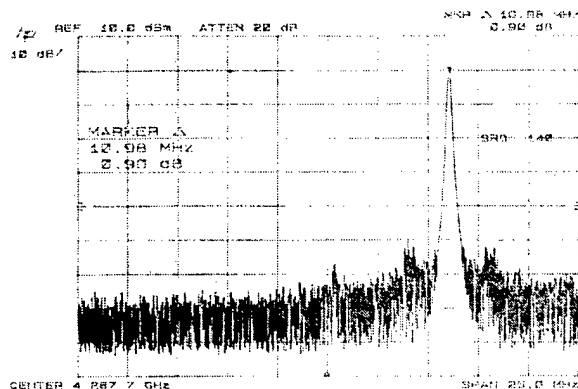


Figure 5. Optical locking bandwidth.

placed behind the optical transistor. No focal lens is used, and the optical power incident on the varactor is estimated to be on the order of  $\mu W$ . The oscillating MESFET is biased at  $V_{ds} = 3 V$  and  $I_{ds} = 20 mA$ . Oscillating frequency is in the region of 4.0 GHz. By varying  $V_{gs}$  of the optical varactor, this can be adjusted by several hundred MHz.

First, the optical link for antenna remoting is tested. The modulator is biased at 2.54 V and is driven by a RF tone of +10dBm at 4.3 GHz. At the antenna site, -10dBm output power is obtained for injection locking into the array. This is sufficient to injection lock the array over an 11 MHz range, as shown in Figure 5. Injection locking range can be increased either the gain of the amplifier in the optical link.

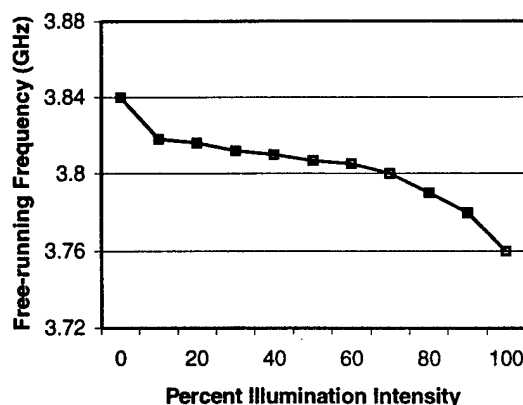


Figure 6. Free-running frequency vs. optical bias.